SL-14RCN

12−Button Master Room Controller with USB Port

The SL−14RCN is a highly versatile master room controller that acts as an all−in−one extended remote control panel for AV equipment. Optional 3−button remote control panels duplicate the functionality of its front panel push buttons.

FEATURES

- 12 Configurable Front Panel Pushbuttons.
- 1 General Purpose I/O Port - Configures as an analog input, digital input, or digital output for interfacing with a variety of devices such as sensors, switches, LEDs, and relays.
- 6 Bidirectional RS-232 Ports - Control AV equipment such as projectors, LCD and PDP displays, power amplifiers, switchers and scalers.
- 2 Relay Contacts - Control other room items related to the AV system, such as raising and lowering drapes, screen or projector.
- 2 Output IR Control.
- USB Port - On back panel for device configuration.
- IR Learning Function - Learns commands from any IR remote.
- Kramer Site-CTRL™ Compatibility - Works with Kramer Site−CTRL™ software for network remote control and management over the Ethernet port.
- K-NET™ Control Channel - Connects to RC−3TB Remote Control Panels or to compatible user interfaces and supplies power and control data over a single cable.
- Flexible Control Options - Via front panel, RC−3TB/RC−3TBU dedicated Remote Control Panel, Ethernet and K−NET™.
- Standard 19” Rack Mount Size - 1U. Rack "ears" included.

SL-14RCN

TECHNICAL SPECIFICATIONS
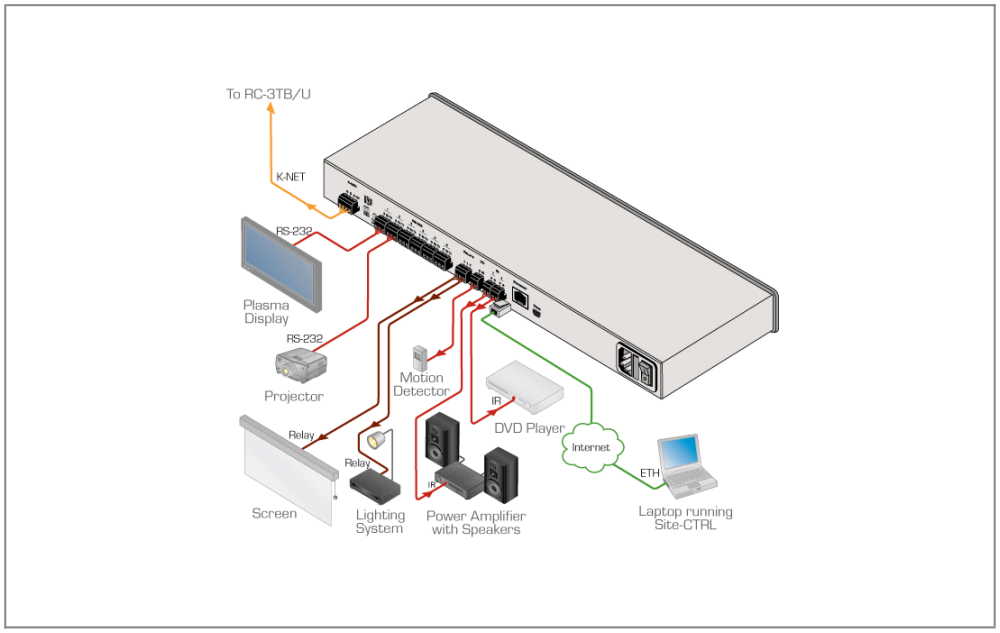
PORTS:	K−NET™, 6 RS−232 and 1 GPI/O on terminal block connectors, Ethernet on RJ−45 connector, 1 infrared.
OUTPUTS:	2 relays (36V AC or DC, 2A, 60V AC maximum on non−inductive load) and 2 IR ports on terminal block connectors.
POWER CONSUMPTION:	100−240V AC, 22VA.
OPERATING TEMPERATURE:	0° to +40°C (32° to 104°F).
STORAGE TEMPERATURE:	−40° to +70°C (−40° to 158°F).
HUMIDITY:	10% to 90%, RHL non−condensing.
DIMENSIONS:	48.26cm x 11.5cm x 1U (19" x 4.5" x 1U) W, D, H.
WEIGHT:	0.6kg (1.4lbs) approx.
ACCESSORIES:	Power cord, rack "ears".
OPTIONS:	RC−3TB Remote Control Panel, IR emitter cables.